



# Datasheet

## Crystalline PV Module

### Baseline NMC CHSM6610P Series

\* NMC : Cell made in Non-Mainland China

EN

230	235	240	245	250	255	260
-----	-----	-----	-----	-----	-----	-----

ELECTRICAL SPECIFICATIONS							
STC rated output (P <sub>mpp</sub> )*	230 Wp	235 Wp	240 Wp	245 Wp	250 Wp	255 Wp	260 Wp
PTC rated output (P <sub>mpp</sub> )**	209.2 Wp	213.9 Wp	218.5 Wp	223.2 Wp	227.9 Wp	232.5 Wp	237.2 Wp
Standard sorted output	-0/+5 Wp						
Warranted power output STC (P <sub>mpp min</sub> )	230 Wp	235 Wp	240 Wp	245 Wp	250 Wp	255 Wp	260 Wp
Rated voltage (V <sub>mpp</sub> ) at STC	28.78 V	29.16 V	29.54 V	29.92 V	30.30 V	30.68 V	31.05 V
Rated current (I <sub>mpp</sub> ) at STC	7.99 A	8.06 A	8.13 A	8.20 A	8.27 A	8.33 A	8.39 A
Open circuit voltage (V <sub>oc</sub> ) at STC	37.35 V	37.56 V	37.77 V	37.98 V	38.19 V	38.40 V	38.53 V
Short circuit current (I <sub>sc</sub> ) at STC	8.53 A	8.56 A	8.59 A	8.62 A	8.65 A	8.69 A	8.72 A
Module efficiency	14.0%	14.3%	14.6%	14.9%	15.2%	15.5%	15.8%
Rated output (P <sub>mpp</sub> ) at NOCT	172.5 Wp	176.3 Wp	180.0 Wp	183.8 Wp	187.5 Wp	191.3 Wp	195.0 Wp
Rated voltage (V <sub>mpp</sub> ) at NOCT	26.08 V	26.42 V	26.75 V	27.06 V	27.37 V	27.73 V	28.08 V
Rated current (I <sub>mpp</sub> ) at NOCT	6.61 A	6.67 A	6.73 A	6.79 A	6.85 A	6.90 A	6.95 A
Open circuit voltage (V <sub>oc</sub> ) at NOCT	34.12 V	34.31 V	34.50 V	34.70 V	34.89 V	35.08 V	35.20 V
Short circuit current (I <sub>sc</sub> ) at NOCT	7.18 A	7.21 A	7.23 A	7.26 A	7.28 A	7.32 A	7.34 A
Temperature coefficient (P <sub>mpp</sub> )	- 0.469%/K						
Temperature coefficient (I <sub>sc</sub> )	+0.052%/K						
Temperature coefficient (I <sub>mpp</sub> )	- 0.008%/K						
Temperature coefficient (V <sub>mpp</sub> )	- 0.463%/K						
Temperature coefficient (V <sub>oc</sub> )	- 0.344%/K						
Normal operating cell temperature (NOCT)	43±2°C						
Maximum system voltage NEC	600 Vdc / 1000 Vdc						
Number of diodes	6						
Maximum series fuse rating	15 A						

\* Measurement tolerance +/- 3%  
 \*\* Estimated



## QUALIFICATION AND WARRANTIES

Product standard	UL 1703
Extended product warranty	10 years
Output warranty of 90% performance $P_{mpp}$ (STC)	10 years
Output warranty of 80% performance $P_{mpp}$ (STC)	25 years
MunichRe Warranty	25 years

## CELL TECHNOLOGY

Cell type	polycrystalline
Number of cells / cell arrangement	60 / 6 x10
Cells dimension	6"

## MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1652 x 994 x 35 mm 65.04 x 39.13 x 1.38 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Weight (module only)	19 kg / 41.8 lbs
Front glass thickness	3.2 mm / 0.13 in
Junction box IP rating	IP 65
Cable length / diameter (UL)	1000 mm / 39.37 in / 12 AWG
Maximum load capacity	5400 Pa
Fire class	C
Connector type (UL)	Multi Contact type 4 / MC type 4 compatible

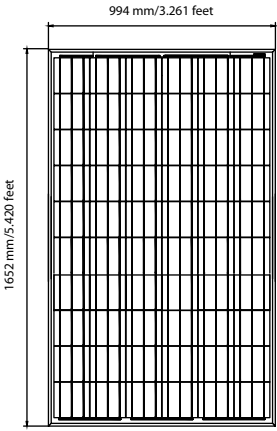
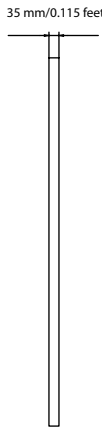
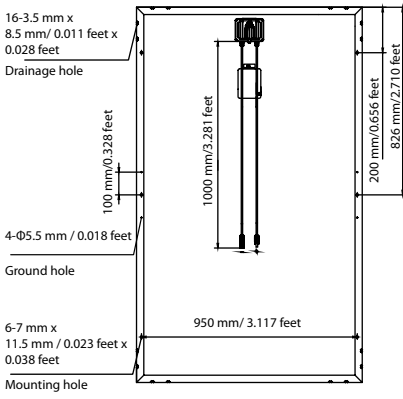
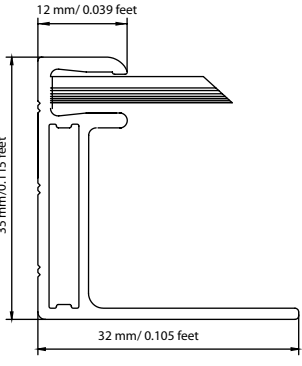
## MISCELLANEOUS

Packing unit	28 modules
Weight of packing unit	585 kg / 1287 lbs

## ARTICLE NUMBER (per panel) - Baseline (NMC) CHSM6610P Series

Model	Article No. (UL)
(NMC) CHSM6610P-230	200245
(NMC) CHSM6610P-235	200246
(NMC) CHSM6610P-240	200247
(NMC) CHSM6610P-245	200248
(NMC) CHSM6610P-250	200249
(NMC) CHSM6610P-255	200250
(NMC) CHSM6610P-260	200251

## DETAILS DES DIMENSIONS DU MODULE

Front view	Side view	Rear view	Frame cross section
			

© Chint Solar (Zhejiang) Co., Ltd. All rights reserved.  
Specifications and designs included in this datasheet are subject to change without notice.