



NOVA™ Datasheet Crystalline PV Module CHSM6610M Series

250 255 260 265

EN

ELECTRICAL SPECIFICATIONS

	250 Wp	255 Wp	260 Wp	265 Wp
STC rated output (P_{mpp})*	250 Wp	255 Wp	260 Wp	265 Wp
PTC rated output (P_{mpp} **)	223.0 Wp	227.6 Wp	232.2 Wp	236.8 Wp
Standard sorted output	-0/+5 Wp			
Warranted power output STC ($P_{mpp\ min}$)	250 Wp	255 Wp	260 Wp	265 Wp
Rated voltage (V_{mpp}) at STC	30.48 V	30.84 V	31.19 V	31.49 V
Rated current (I_{mpp}) at STC	8.23 A	8.31 A	8.38 A	8.44 A
Open circuit voltage (V_{oc}) at STC	38.09 V	38.24 V	38.39 V	38.55 V
Short circuit current (I_{sc}) at STC	8.64 A	8.67 A	8.70 A	8.74 A
Module efficiency	15.2%	15.5%	15.8%	16.1%
Rated output (P_{mpp}) at NOCT	181.2 Wp	184.8 Wp	188.4 Wp	192.1 Wp
Rated voltage (V_{mpp}) at NOCT	27.15 V	27.43 V	27.73 V	28.06 V
Rated current (I_{mpp}) at NOCT	6.67 A	6.74 A	6.79 A	6.84 A
Open circuit voltage (V_{oc}) at NOCT	34.66 V	34.80 V	34.94 V	35.08 V
Short circuit current (I_{sc}) at NOCT	7.13 A	7.15 A	7.18 A	7.21 A
Temperature coefficient (P_{mpp})	-0.469%/K			
Temperature coefficient (I_{sc})	+0.035%/K			
Temperature coefficient (I_{mpp})	-0.042%/K			
Temperature coefficient (V_{mpp})	-0.433%/K			
Temperature coefficient (V_{oc})	-0.328%/K			
Normal operating cell temperature (NOCT)	47±2°C			
Maximum system voltage SCII				1000 Vdc
Maximum system voltage NEC				600 Vdc / 1000 Vdc
Number of diodes				6
Maximum series fuse rating				15 A

* Measurement tolerance +/- 3%
** Estimated



QUALIFICATION AND WARRANTIES

Product standard	IEC 61215, 61730 / UL 1703
Extended product warranty	10 years
Output warranty of 90% performance P_{mpp} (STC)	10 years
Output warranty of 80% performance P_{mpp} (STC)	25 years
MunichRe Warranty	25 years

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1652 x 994 x 40 mm 65.04 x 39.13 x 1.57 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Weight (module only)	19.5 kg / 42.9 lbs
Front glass thickness	3.2 mm / 0.13 in
Junction box IP rating	IP 65
Cable length / diameter (UL)	1000 mm / 39.37 in / 12 AWG
Cable length / diameter (IEC)	1000 mm / 39.37 in / 4 mm ²
Maximum load capacity	5400 Pa
Fire class	C
Connector type (UL)	Multi Contact type 4 / MC type 4 compatible
Connector type (TUV)	MC type 4 compatible

CELL TECHNOLOGY

Cell type	monocrystalline
Number of cells / cell arrangement	60 / 6 x 10
Cells dimension	6"

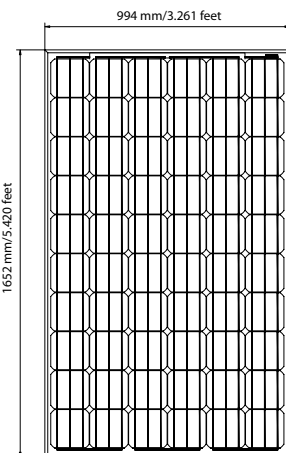
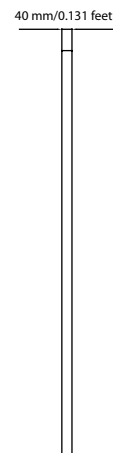
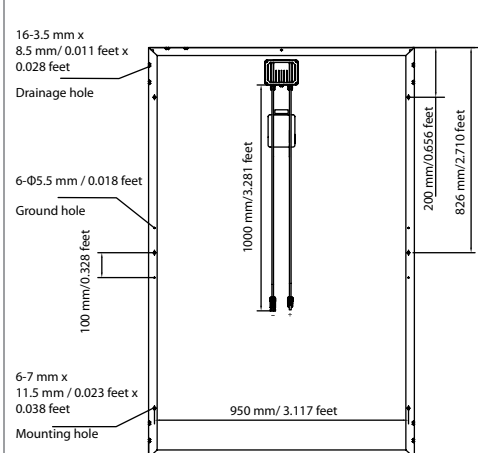
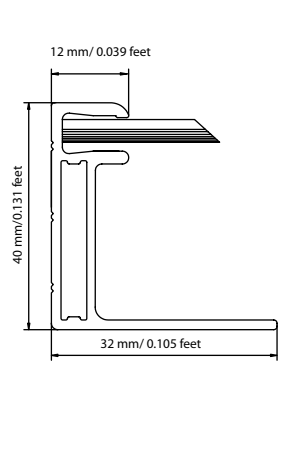
MISCELLANEOUS

Packing unit	25 modules
Weight of packing unit	530 kg / 1166 lbs

ARTICLE NUMBER (per panel)-(NOVA) CHSM6610M Series

Model	Article No. (IEC)	Article No. (UL)
(NOVA) CHSM6610M-250	100287	100298
(NOVA) CHSM6610M-255	100288	100299
(NOVA) CHSM6610M-260	100289	100300
(NOVA) CHSM6610M-265	100290	100301

MODULE DIMENSION DETAILS

Front view	Side view	Rear view	Frame cross section
			

© Chint Solar (Zhejiang) Co., Ltd. All rights reserved.
Specifications and designs included in this datasheet are subject to change without notice.