



NXBLE-125 Residual current operated circuit breaker (RCBO)

1. Compliant standards

IEC60947-2

2. Compliant certification

CE

3. Major function

Overload protection, short circuit protection, isolation, residual current operation

4. Technical parameters

Rated current: 63, 80, 100 (1P+N, 2P, 3P, 3P+N, 4P), 125 (1P+N, 2P);

Rated residual operating current: 0.03A, 0.05A, 0.075A, 0.1A, 0.3A;

Rated voltage: 240V ~ (1P+N, 2P), 415V ~ (3P, 3P+N, 4P);

Frequency: 50Hz;

Electromagnetic release type: C, D;

Number of poles: 1P+N, 2P, 3P, 3P+N, 4P;

Mechanical life: 20000 cycles;


Electrical life: 6000 cycles ($I_{n} \leq 100A$); 4000 cycles ($I_{n} > 100A$);

Rated short-circuit breaking capacity(I_{cu}): 10000A;

Short-circuit breaking capacity(I_{cs}): 7500A;

Rated impulse withstand voltage(U_{imp}): 4kV.

5. Dimensions and installation sizes

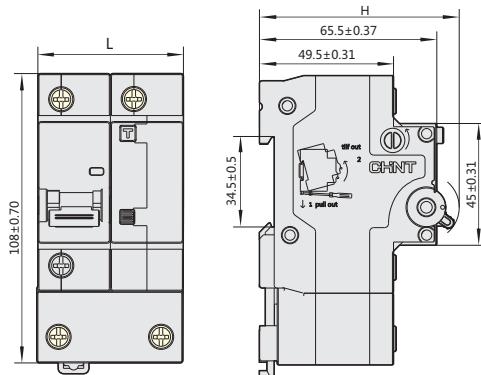

	1P+N	2P	3P	4P
L(mm)	54 ⁰ _{-0.74}	81 ⁰ _{-0.87}	108 ⁰ _{-1.40}	135 ⁰ _{-1.60}
H(mm)	75.5 ⁰ _{-1.20}	78.5 ⁰ _{-1.20}	78.5 ⁰ _{-1.20}	78.5 ⁰ _{-1.20}